




HIGH PERF

- · Comes in supply and return units.
- Fiberglass plenum prescored for 5"-16" flexible duct connection.
- 100% foil reinforcement molded fiber glass plenum.
- Near perfect air distribution full 360 degree air flow - no dead air corners.
- 1. Molded fiber glass plenums.
- All supply units have 4-way pattern control for easy adjustment to 3,2 or 1 way throws.
- 3. Thermal insulation.
- Acoustical absorption surpassing any steel products.
- Light weight, overall economy, simplified ordering and fast delivery.
- Easy to install simply bend clips over the T-bars at diagonal corners and affix to cross member using #8 sheet metal screws.



RETURN AIR FILTER GRILLE

- Completely universal, one size fiber glass return plenum prescored for 6" thru 14" flex duct connections.
- Uses a standard 20" x 20" x 1" filter.
- Easy to change the filter no need to climb on a roof or dirty equipment room.
- Comes complete with a filter installed.
- 1. Molded fiber glass plenums.
- 2. Thermal insulation.
- Acoustical absorption surpassing any steel products.
- Light weight, overall economy, simplified ordering and fast delivery.
- Easy to install simply bend clips over the T-bars at diagonal corners and affix to cross member using #8 sheet metal screws.






LI4PC & LIRD

- · L.I. models come in supply and return units.
- This model is available in both a 24" x 24" and 12" x 24" size.
- Fiber glass plenum prescored for 5"-16" flexible duct connection on the 24" x 24" and 5"-10" flex duct connections on the 12" x 24" unit.
- The 12" x 24" model is ideal for small offices and mobile or modular structures.
- 1. Molded fiber glass plenums.
- All supply units have 4-way pattern control for easy adjustment to 3,2 or 1 way throws.
- 3. Thermal insulation.
- Acoustical absorption surpassing any steel products.
- Light weight, overall economy, simplified ordering and fast delivery.
- Easy to install simply bend clips over the T-bars at diagonal corners and affix to cross member using #8 sheet metal screws.



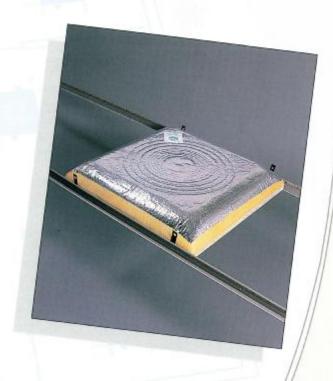

SLIM LINE

- Comes in supply and return units.
- Fiber glass plenum prescored for 5"-12" flexible duct connection
- 100% foil reinforcement molded fiber glass plenum.
- 1. Molded fiber glass plenums.
- All supply units have 4-way pattern control for easy adjustment to 3,2 or 1 way throws.
- 3. Thermal insulation.
- Acoustical absorption surpassing any steel products.
- Light weight, overall economy, simplified ordering and fast delivery.
- Easy to install simply bend clips over the T-bars at diagonal corners and affix to cross member using #8 sheet metal screws.

